

Electro - Pneumatic Positioner

- Easy maintenance
- For rotary actuators
- Vibration resistance
- Linearity: %1.5
- Body: Aluminium injection
- Protection Class: Exmd II BT5(05 ATEX 1076x)
- Optional: Exmd II BT5, Ex ia IIBT6
- Stainless manometer standard




EPR Electromechanic Positioner (Rotary)
EPL Electromechanic Positioner (Linear)



EPR
Electro - Pneumatic Positioner

APPLICATION

For pneumatic actuated valves proportional control.

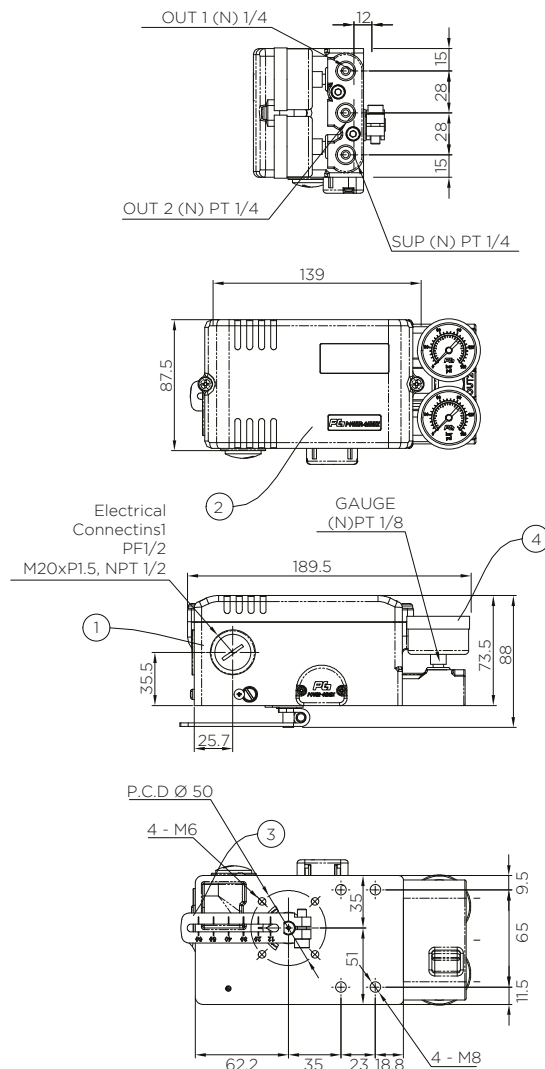

Electro - Pneumatic Positioner

TYPE	INPUT SIGNAL AND AIR SUPPLU PRESSURE	PROTECTION CLASS	BRACKET	BODY	AIR CONSUMPTION	WEIGHT
TORK-EPR	mA/bar	I/P66	Namur		LPM	(kg)
TDRK-EP.R Rotary	4-20 mA / max. 7 bar	I/P 66	80x30	Aluminium Die Cast	5 LPM (1.4 Kgf / cm ²)	2.9
TDRK-EPL. Lineer	4-20 mA / max. 7 bar	I/P 66	80x30	Aluminium Die Cast	5 LPM (1.4 Kgf/cm ²)	2.9