

3 PIECES STAINLESS STEEL Ball Valve, Threaded

Design


Size : DIN 3203
Connection : NPT/Rc/Rp/G
Actuator Connection : ISO 5211

Technical Features

Working Pressure : 1000 WOG
Working Temperature : -30°C / +120°C
Usage : water, oil, gas



NO	PART NAME	MATERIAL
1	Body	CF8/M
2	End Cap	CF8/M
3	Ball	304/316
4	Stem	304/316
5	Seat	PTFE
6	Gasket	PTFE
7	Thrust Washer	PTFE
8	Stem o-ring	VITON
9	Packing	PTFE
10	Metal Ring	304
11	Belleville Washer	304
12	Gland	CF8/M
13	Stop Plate	304
14	Nut	304
15	Inner six angle screw	304
16	Handle	CF8
17	Bolt	304
18	Nut	304
19	Bolt	304
20	Nut	304

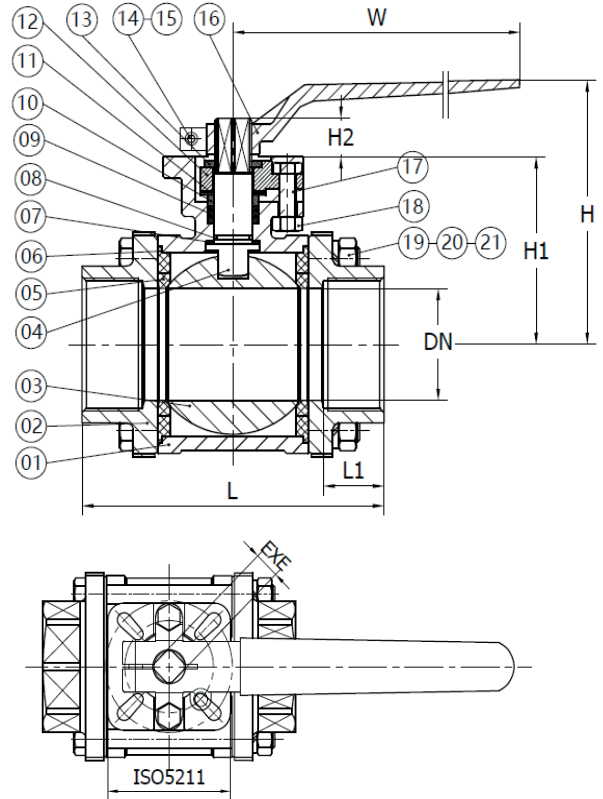

SIZE	DN	L	L1	E	H	H1	H2	W	ISO5211
1/2	15	75	15	9	67	40	8	110	F04/F05
3/4	20	80	15.5	9	73	46	8	110	F04/F05
1	25	90	18	11	88	57	10	160	F04/F05
1 1/4	32	110	20	11	95	64	10	160	F04/F05
1 1/2	40	120	23	14	107.5	71	14	185	F05/F07
2	50	140	25	14	118.5	82	14	185	F05/F07
2 1/2	65	185	35	17	168	100	16	265	F07/F10
3	80	206	39	17	178	110	16	315	F07/F10
4	100	240	39	19	198	130	18	315	F07/F10